


## IM20A03EU

### 2.0MP Low-illumination HD IPC Module



The IM20A03EU is a cost-effective 2MP surveillance network camera module designed for both indoor and outdoor use. It features a 1/2.8" Sony IMX307 STARVIS sensor and is powered by the GOKE GK7205V300 SoC, equipped with 1Gb of RAM. In terms of extended I/O capabilities, it supports dual light source illumination, as well as microphone and speaker connections, supports external sound post interfaces and additional interfaces.

For secondary development, the IM20A03EU includes two set UART interfaces and provides SDKs for Windows, Linux, and Android. It also supports the ONVIF standard protocol, along with OpenIPC and FPV firmware. This makes it highly convenient for secondary development and allows for quick integration into your projects.


#### Key Features:

- 1/2.8" 2MP Sony IMX307 STARVIS CMOS
- Maximum resolution up to 1920×1080@60fps
- True Day/Night, 3D DNR, Digital WDR
- Support humanoid detection, motion detection
- Support the Tuya P2P on Android, IOS(Not Default)
- Support two way audio, 1 MIC,1 Speaker,1 column speaker line out interface
- Support ONVIF and HIK/XM protocol
- Support TCP/IP/HTTP/NTP/DHCP/SMTP/RTSP
- Open SDK(Linux,Windows), CGI, Support OPENIPC development

## Technical Specifications:

<b>Image Sensor</b>	
Sensor	1/2.8" 2MP Sony IMX307 STARVIS CMOS
Maximum Resolution	1920x1080@60fps
Minimum Illumination	0.01lux @F1.0(Color) / 0.005 lux@F1.0 (B/W)
<b>Camera</b>	
AGC	Auto/Manual
S/N Ratio	≥45dB (AGC OFF)
Shutter Speed	1/2 - 1/20 ,000s,Slow shutter support
Wide Dynamic Range	Digital WDR
Exposure Mode	Auto/ Manual/shutter mode
AWB	Yes
Day & Night	External control (IR Cut Filter)
Light Control	Support IR/White/dual light, three mode independent control
<b>Compression</b>	
Video Compression	H.265/H.264 Main Profile /M-JPEG
Audio Compression	G711U,G711A,PCM
<b>Image Resolution</b>	
Main Stream	1920 × 1080/ 1280x960/ 1280x720@60fps
Sub Stream	640×480/480x360/352×288/176×144@60fps
<b>General Protocol</b>	
Network Protocol	TCP/IP/HTTP/NTP/DHCP/SMTP/RTSP/P2P
ONVIF protocol	Yes
Compatibility	Support HIK/XM protocol
<b>P2P</b>	
Support TUYA APP	Support the Tuya P2P on Android, IOS(Not Default)
<b>Function</b>	
Web Configuration	Yes
OSD	Yes
Motion Detection	Yes
Humanoid Detection	Yes
Reset	Support cable reset button(optical)
Amplifier	Built-in amplifier
<b>Interface</b>	
Wired	1ch 10/100 BaseT Ethernet,RJ45 interface
Audio	Audio input/output,1 MIC,1 Speaker,1 column speaker line out interface
Alarm	2 ports input, 2 ports output
UART	Support
USB	Support
TF Card	Optional and max. 512G (reserved extended SD slot)
<b>Other</b>	
Power Supply	DC 12V
Size/Weight	38x38mm /10g
Operation Temperature	-30°C~60°C
Working Humidity	≤90%RH(non-condensing)

## Interface Pin Definition:

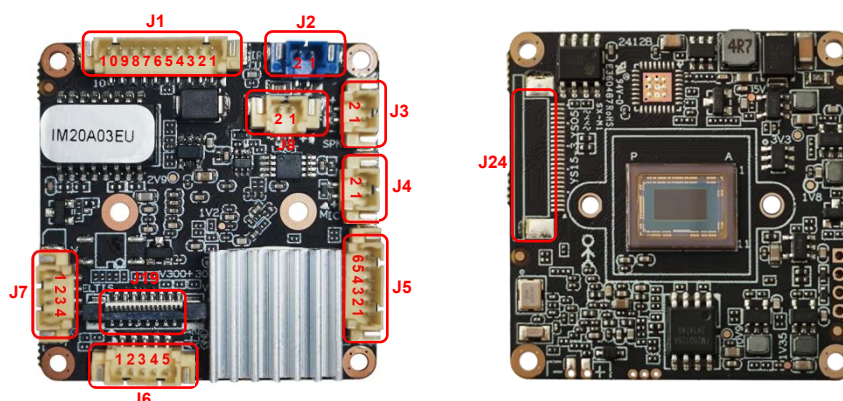

Interface	pin	Pin name	Functional parameter
<b>J1</b>	1	12VDC	DC Input, voltage range 9V-13.8V
	2	GND	GND
	3	ACT_LED	Network indicator light interface
	4	SYS_RST	Restore factory settings LOW valid
	5	PWR_TD+	Adaptive network interface, physically receiving/transmitting signals (differential +)
	6	PWR_TD-	Adaptive network interface, physically receiving/transmitting signals (difference -)
	7	PWR_RD+	Adaptive network interface, physically receiving/transmitting signals (differential+)
	8	PWR_RD-	Adaptive network interface, physically receiving/transmitting signals (difference -)
	9	UART1_TXD	Serial communication, sending TX
	10	UART1_RXD	UART1, receive RX
<b>J2</b>	1	IR-CUT +	IRCUT signal +
	2	IR-CUT -	IRCUT signal-
<b>J3</b>	1	SPK+	SPK+
	2	SPK-	SPK-
<b>J4</b>	1	MIC+	MIC+
	2	MIC-	MIC-
<b>J5</b>	1	GPIO	8 preview GPIO (PWM not supported)
	2	IO_IR	Soft photosensitive infrared
	3	IO_WL	Soft photosensitive white light
	4	GDS_IN	Hard light sensitive infrared
	5	GND	GND
	6	12VDC_OUT	12VDC_OUT
<b>J6</b>	1	ALARM_IN1	ALARM_IN1
	2	ALARM_IN2	ALARM_IN2
	3	GND	GND
	4	ALARM_OUT1	ALARM_OUT1
	5	ALARM_OUT2	ALARM_OUT2
<b>J7</b>	1	3.3V	3.3V power supply
	2	USB_DM	data D-
	3	USB_DP	data D+
	4	GND	GND
<b>J8</b>	1	LINE OUT	Connect the sound column
	2	GND	GND
<b>J19</b>	1-16	EXPAND	Expand TF card storage, RS485, Reset function
<b>J24</b>	1-24	AF	Youshi autofocus lens interface(Reserved)